



## Room Temperature Sensors

## QAA20...

- Passive sensors for acquiring the temperature in rooms.
- Range of use 0...50 °C / <85 % r. h.

### Use

In heating, ventilation and air conditioning plants for acquiring the room temperature.

### Type summary

<i>Type reference</i>	<i>Sensing element</i>	<i>Range of use</i>	<i>Time constant</i>
<b>QAA2010</b>	Pt 100	0...50 °C	Approx. 7 min
<b>QAA2012</b>	Pt 1000	0...50 °C	Approx. 7 min
<b>QAA2040</b>	T1	0...50 °C	Approx. 7 min
<b>QAA2030</b>	NTC 10k	0...50 °C	Approx. 7 min

### Ordering

When ordering, please give name and type reference, e.g.:  
Room temperature sensor **QAA2010**

### Equipment combinations


The room temperature sensors are suited for use with all types of controllers that can handle analog, passive sensor signals.

The sensor acquires the room temperature via its sensing element.  
 The resistance of the sensing element changes as a function of the ambient temperature. The resistance value is used for further handling by a suitable controller.


**Sensing element**

Pt 100 (class B)



Characteristic:

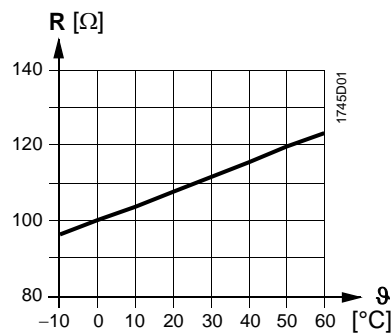



Accuracy:

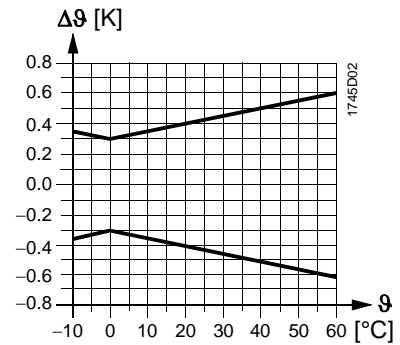



Pt 1000 (class B)

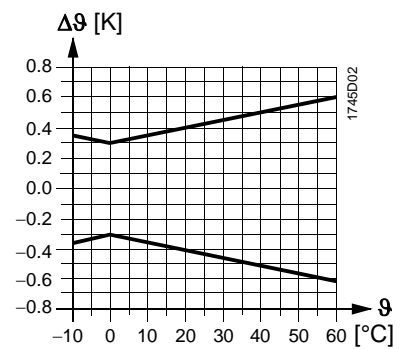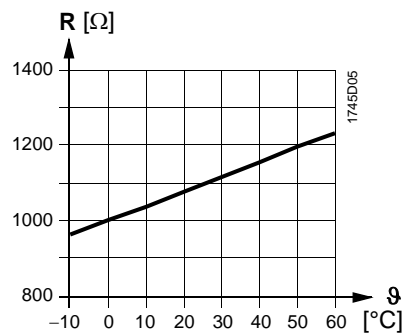

T1 (PTC)

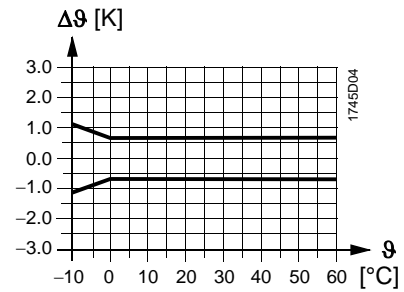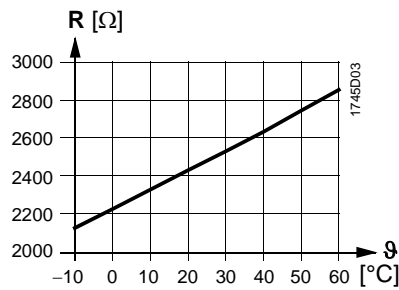

NTC 10k

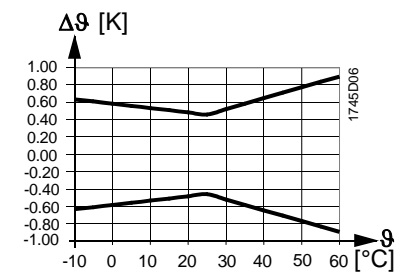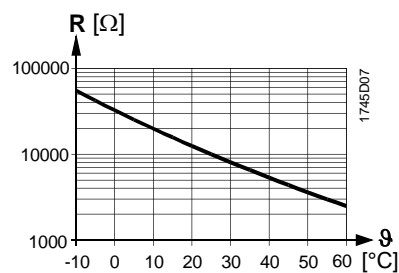

**Legend**

- R Resistance in Ohm
- $\theta$  Temperature in degrees Celsius
- $\Delta\theta$  Temperature differential in Kelvin

## Mechanical design

---

The units have been designed for wall mounting. They are suited for use with most types of commercially available recessed conduit boxes. The cables can be introduced from the rear (concealed wiring) or from below or above (surface-run wires) through knock-out openings.

The units consist of 2 major sections: Housing and base. Both snap together but can be detached again. The base carries the connection terminals.

## Disposal

The major plastic components bear the material references in compliance with ISO / DIS 11469 to facilitate environment-friendly disposal.

## Engineering notes

---

The permissible cable lengths are dependent on the type of controller with which the sensor is used. They are specified in the Data Sheet of the relevant controller.

## Mounting notes

---

Location: On an inner wall of the space to be heated or air conditioned. Not in recesses, shelves, not behind curtains, not opposite or near heat sources.

The unit must not be exposed to direct solar radiation.

The end of the conduit at the sensor must be sealed to prevent false measurements due to drafts through the conduit.

The permissible ambient conditions should be observed.


Installation Instructions are printed on the packaging.

## Technical data

---


Functional data	Range of use	refer to "Type summary"
	Sensing element	refer to "Type summary"
	Time constant	refer to "Type summary"
	Measuring accuracy	refer to "Function"
	Type of measurement and output	passive
Protective data	Degree of protection	IP 30 to IEC 529
	Safety class	III to EN 60730
Electrical connections	Screw terminals for	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>
	Perm. cable lengths	refer to "Engineering notes"
Environmental conditions	Operation	to IEC 721-3-3
	Climatic condition	class 3K5
	Temperature	0...50 °C
	Humidity	<85 % r. h.
	Transport	to IEC 721-3-2
	Climatic condition	class 2K3
Temperature	-25...+65 °C	
Humidity	<95 % r. h.	
Mechanical environmental conditions	class 2M2	
Materials and colors	Housing front	ASA+PC, NCS S 0502-G (withe)
	Bottom	ASA+PC, NCS 2801-Y43R (grey)
	Base	PC, NCS 2801-Y43R (grey)
	Packaging	corrugated cardboard
	Sensor (complete assembly)	silicone-free
Weight	Incl. packaging	Ca. 0,1 kg

## Internal diagram



The internal diagram is identical for all types of room temperature sensors covered by this Data Sheet.  
The connecting wires are interchangeable.

## Dimensions

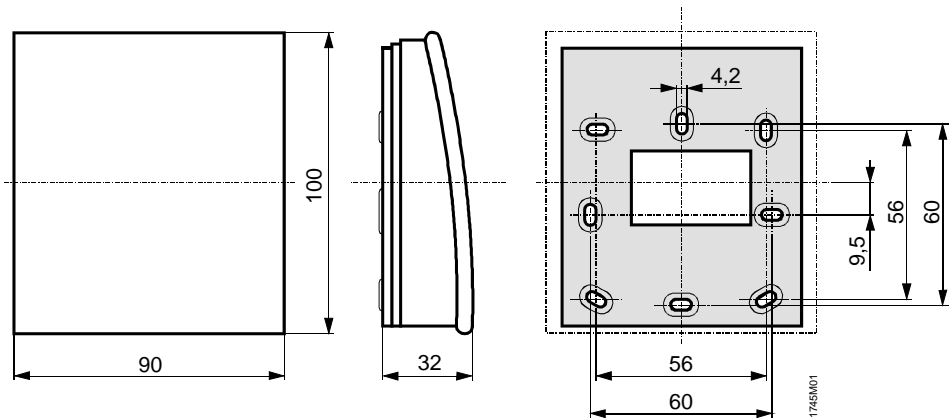

Dimensions in mm